




## Cloud Human Machine Interface

### Features


- 9.7" 1024 x 768 TFT LCD, LED Backlight
- Fan-less Cooling System
- Built-in 512 MB Flash Memory
- One Gigabit Ethernet Port
- Built-in mono speaker
- Built-in Power Isolator

<b>Display</b>	Display	9.7" TFT
	Resolution	1024 x 768
	Brightness (cd/m <sup>2</sup> )	350
	Contrast Ratio	500:1
	Backlight Type	LED
	Backlight Life Time	>30,000 hrs.
	Colors	262K
<b>Touch Panel</b>	Type	Tempered Glass, Capacitive Type
	Accuracy	Active Area Length(X)±2%, Width(Y)±2%
<b>Memory</b>	Flash	512 MB
	RAM	1 GB
<b>Processor</b>		32 bits RISC Cortex-A9 1GHz
<b>I/O Port</b>	SD Card Slot	N/A
	USB Host	N/A
	USB Client	N/A
	Ethernet	10/100/1000 Base T x 1
	COM Port	N/A
	RS-485 Dual Isolation	N/A
	CAN Bus	N/A
	HDMI	N/A
	Audio Output	Built-in Mono Speaker
	Video Input	N/A
<b>RTC</b>		Built-in
<b>Power</b>	Input Power	24±20%VDC
	Power Isolation	Built-in
	Power Consumption	900mA@24VDC
	Voltage Resistance	500VAC (1 min.)
	Isolation Resistance	Exceed 50MΩ at 500VDC
	Vibration Endurance	10 to 25Hz (X, Y, Z direction 2G 30 minutes)
<b>Specification</b>	PCB Coating	Yes
	Enclosure	Plastic
	Dimensions WxHxD	257.2 x 199.7 x 32.7 mm
	Panel Cutout	250 x 192 mm
	Weight	Approx. 0.76 kg
	Mount	Panel mount, VESA mount 75 x 75 mm
<b>Environment</b>	Protection Structure	NEMA4 / IP65 Compliant Front Panel
	Storage Temperature	-20° ~ 60°C (-4° ~ 140°F)
	Operating Temperature	0° ~ 50°C (32° ~ 122°F)
	Relative Humidity	10% ~ 90% (non-condensing)
<b>Certificate</b>	CE	CE marked
	UL	cULus Listed
<b>Language</b>	Display	English, French, Italian, Spanish, Russian, Simplified Chinese, Traditional Chinese, Korean, German
	Input Methods	English, French, Italian, Spanish, German, Russian, Pinyin, Zhuyin
<b>Software</b>		cMT Viewer


## cMT-iV5 Dimensions

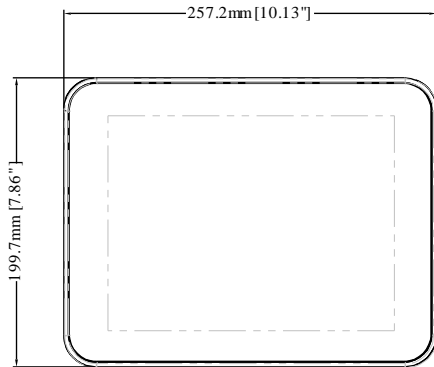


Front View

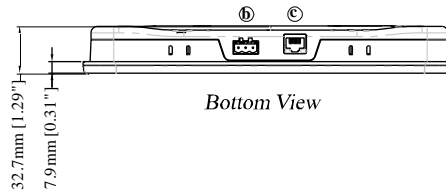

Bottom View

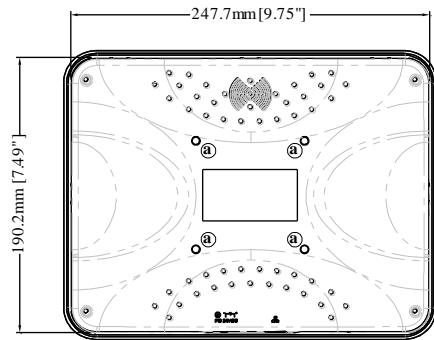

Rear View

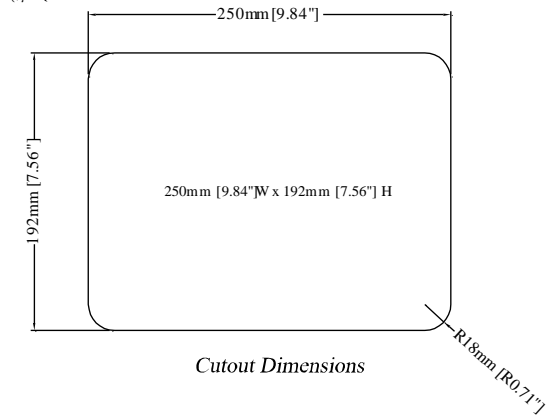

Cutout Dimensions

<b>a</b>	<b>VESA 75 mm Screw Holes</b>	<b>c</b>	<b>Ethernet Port</b>
<b>b</b>	<b>Power Connector</b>		

### Ordering Information

#### cMT-iV5

Cloud Human Machine Interface  
 512 MB flash memory  
 1 GB RAM on board  
 10/100/1000M Ethernet port x 1

#### cMT-SVRiV5

cMT-SVR & cMT-iV5 Bundle Package  
 cMT-SVR x 1  
 cMT-iV5 x 1  
 Ethernet cable 2m x 1